

Proven Every Day // Proven Everywhere®



# ABOUT LA-CO/MARKAL

# **Our Products**



ALL-WEATHER®


From a simple but brilliant idea - putting paint into a convenient hand-held marker – to an array of thousands of products, LA-CO<sup>®</sup>/Markal<sup>®</sup> has led the way in marking, plumbing chemicals and livestock identification technology for over 75 years. With the development of unique specialty chemical products that meet demanding industrial applications, the LA-CO and Markal brands have become the leaders in the industries they serve.

LA-CO is a performance-based company. Performance in the products we manufacture; in the service to our customers; and in our people, who are our most important resource.

Our company's success has been founded on the belief that first and foremost we listen to our customers. Once we determine their future needs, then we can develop high performance products that meet or exceed those needs. We continue to make extensive investments in new equipment and manufacturing processes and in new product research to meet the ever changing needs of our customers.

Today LA-CO & Markal branded products are sold through over 6,500 distributors around the world in over 30 countries. This extensive network allows us to provide the highest level of service to our customers.

# **Our Mission**





To be environmentally

responsible in the design and manufacture of our products. To promote the growth and well-being of our employees."



Family owned and operated since 1934

# **CONTENTS**

#### **MARKER APPLICATION CHART**

Find What You're Looking For

• Dura-Ball®

A Handy Reference Chart of Markal® Markers and Various Surfaces

#### **LIQUID PAINT MARKERS** Works Like a Marker, Lasts Like Paint

- Valve Action®
- Pro-Wash®
- Pro-Line® HP • Pro-Max®
- Pro-Line® Ball Paint Marker®



#### **SOLID PAINT MARKERS**

#### **Real Paint in Stick Form**

AMBIENT SURFACE • B®, B-E®, B-L®, BL-W®

C<sup>®</sup>, E<sup>®</sup>, F<sup>®</sup>, Fast Dry<sup>®</sup>

M® and M-10, N®, O-10, P

- - WS-3/8® • Quik Stik®
- H®, HT®, HT-34®, HT-40®, HT-75® • J<sup>®</sup>, K<sup>®</sup>, PK<sup>®</sup>, X-5<sup>®</sup>

**HOT SURFACE** 

#### **FELT-TIP INK MARKERS** Works as Hard as You Do

- DURA-INK® 15, 25, 55, 80, 200
- Plastic Tag
- DURA-INK® Dry Erase





• Lumber Crayon #200 & #500 OptiMark® • UltraScan® • Lumber Crayon Holders

TEMPERATURE INDICATORS

**LUMBER & TIMBER MARKERS** 

#### As Individual as Your Job **SPECIALTY MARKERS**

 Welders Pencils Silver-Streak®

• Red-Riter®

Soapstone

• Thermomelt®

Metal Holders

- Trades Marker<sup>®</sup>
- China Marker
- Carpenter's Pencil
- Tyre Marque®

Zephyr<sup>®</sup>

Lacquer-Stik®

Railroad Chalk

# When the Heat Is On



Get a Grip



#### **MARKER HOLDERS**

- Wooden Holders
- Hot Surface Holders Combination Holder

#### **PLUMBING & CHEMICAL PRODUCTS** For Demanding Applications

- Thread Sealants
- Cool Gel® Heat Barrier Spray
- Flux
- · Lubricating Oil
- Anti-Seize Compounds
- Thread Tapes



34-35

**Our People** 

LA-CO's employees are our

most important asset. They

conduct the research for

new and better products,

maintain the high quality level

of our products and provide

fast, efficient customer

service to all our customers.

Without them, we could

not maintain the leader-

ship role in the marketplace

that we enjoy today. Their

experience, dedication

and hard work will ensure

LA-CO's future success.

customer service 800-621-4025

22-25

30-3

# MARKER APPLICATION CHART

					`			_									•		•																											
MARKER TYPE			LI	QUI	D P.	AIN	IT						SO	LID	PAI	NT							S	OLII	D PA	INT				INI	<b>(</b>	LU/	МВЕ	ER N	IAR	KINC	G			S	PEC	IALT	Υ			
												A	MBII	ENT	SU	RFA	CE						Н	OT S	SUR	FACE																		T		
SURFACE TYPE METAL	VALVE ACTION® PAINT MARKER	PRO-LINE® HP	PRO-LINE® Fine/Micro-line	PRO-MAX®	BALL PAINT MARKER®	DURA-BALL®	PRO-WASH® W	PRO-WASH © D	B FAINISTIN	B-I ® PAINTSTIK®	BL-W® PAINTSTIK®	C® PAINTSTIK®	E® PAINTSTIK®	F® PAINTSTIK®	FAST DRY® PAINTSTIK®	M® PAINTSTIK®	M-10 PAINTSTIK®	N® PAINTSTIK®	P PAINTSTIK®	WS-3/8® PAINTSTIK®	QUIK STIK® PAINT MARKER H® PAINTSTIK®	HT® DAINTSTIK®	TI TAING BAINTEIN®	HI-34° PAINTSTIK®	HT-75® PAINTSTIK®	J® PAINTSTIK®	K ® PAINTSTIK®	PK ® PAINTSTIK®	X-5° PAINTSTIK®	DURA-INK® DRY ERASE	PLASTIC TAG MARKER	PRO-EX® CRAYON	LUMBER CRAYON #200	LUMBER CRAYON #500	ULTRASCAN®	OPTIMARK®	SCAN-IT PLUS® TRADES-MARKER®	CHINA MARKER	CARPENTER'S PENCIL	WELDERS PENCILS	SILVER-STREAK®	RED-RITER®	SOAPSTONE	TYRE MARQUE®	ZEPHYR® PAINTSTIK®	RAILROAD CHALK
AMBIENT SURFACE, -50° TO 150°F HOT SURFACE (See p.15 for specific temps.) OIL COVERED ROUGH SURFACE BLEED-THROUGH PRIMER HIGH VISIBILITY FOR GALVANIZING NO BLEED-THROUGH MARKING UNDER BLACK LIGHT ANNEALING AND HEAT TREATING TEMPORARY MARKING WOOD	•	•	•	•	•	•						•	•	•	•	- 1	•		•	•	•			•	•	•	•	•	•	•		•	•	•			•			•	•		•		•	•
DRY LOGS WET LOGS GRADING LUMBER, PLYWOOD GRADING LUMBER W/BLACK LIGHT READER CREOSOTED LUMBER HIGH VISIBILITY BOXES & CRATES SURVEYOR'S STAKES PLASTIC	•			•		•							•	•				•			•										•	•	•	•	•	•			•							•
PIPING & TUBING PLASTIC TAGS INVENTORY TAGS BINS & CONTAINERS FILM SHEET - ROD - SLAB LAMINATES GLASS & CERAMICS PERMANENT MARKING	•	•	•	•		•	• •					•	•	•	•			•		•	•										•						•								•	
TEMPORARY MARKING  CONCRETE & STONE  CONCRETE & STONE  PAPER  SIGNS  WAXED OR COATED			•									•		•						•	•									•		•	٠	٠		•	•								•	•
CARDBOARD  SIGNS CARTONS - DRY CARTONS - FROZEN, ICE COVERED  RUBBER  AMBIENT SURFACE, -50° TO 150°F HOT SURFACE, 300° TO 500°F			•	•	•	•							•	•	•					•	•					•			•			•	•	•	•		•	•						•	•	•
CLOTH - FABRICS PERMANENT MARKING TEMPORARY MARKING  • = RECOMMENDED USES	•	•		• p. 6		•						•	• PP		15					•	•		P	р. Го	6-17					18-2	1		Þ	<b>р.</b> 22	• 2-25					Þ	<b>р.</b> 2	6-29	•		•	• 1

# LIQUID PAINT MARKERS



ink, nothing beats real paint. Markal® Liquid Paint Markers can be used on almost any surface in cold to hot extremes. They are ideal for dry, wet or oily surfaces, including metal, wood, plastic, glass, rubber, paper, cardboard and styrofoam. From the original Valve Action® Paint Marker to the new generation of PRO-LINE® and PRO-MAX®, these markers deliver extendedwear marks from fine lines to broad, bold marks. For real paint that washes off quickly and easily with water or mild detergent, Markal Pro-Wash® W and Pro-Wash ®D markers are ideal.

For the durability your job requires,

insist on Markal Liquid Paint Markers.

# LIQUID PAINT-VALVE ACTION®

# **VALVE ACTION®** PAINT MARKERS SEE OUR NEW VIDEO

- NEW xylene-free paint formula eliminates concern about California Proposition 65, EPA HAPS or SARA 313 compliance
- NEW faster drying paint reduces smears and removed marks while allowing almost immediate handling of marked item
- NEW low chlorides/low halogens paint formula. Now all colors are low in chlorides and halogenated compounds, eliminating the need for a separate marker for the stainless steel fabrication and nuclear power industries
- NEW ClipGrip Cap for convenient pocket storage and easier



• The safest and most versatile Markal paint marker ever

oily, soapy and wet surfaces

Unsurpassed writing capability on

•Excellent on most types of metals,

coatings, plastics, glass, ceramics

#### Marks in Real Paint

- NEW Dura-Nib medium bullet tip allows writing on rougher surfaces than conventional nibs and holds up better in tough applications
- 14 colors satisfies any industrial application or quality control identification need
- Excellent all surface marking with durable, fade resistant, high visibility marks
- Temperature range: -50°F to 150°F (-46°C to 66°C)
- Made in the U.S.A.

**NEW!** 

#### Bulk 96809 Purple 96817 Yellow 96822 Red Black Orange Blue 96826 ■ Green Gold 96828 Light Green 48 96830 Pink 96832 Aluminum 96835 Light Blue Carded 96800 96801 Yellow 96802 Red 24 96803 Black 24 96804 Aluminum 24 96805 Blue 96806 Green 24 96807 Orange Replacement Tips 144

#### PRO-LINE® HP PAINT MARKERS



- and other non-porous surfaces Xylene-free paint does not contain any chemicals listed in California Proposition 65, the EPA HAPS list or SARA 313, minimizing employee health, environmental

and waste disposal concerns

 Low in halogenated compounds and sulfur allows use in many stainless steel, nuclear and other corrosion-sensitive applications. Specifications vary by color. See our website, www.markal.com, for typical halogenated compound and sulfur levels for each color

# **High Performance Paint**

- Leaves permanent, highly visible marks that dry quickly and resist wearing and fading
- NEW Dura-Nib medium bullet tip allows writing on rougher surfaces than conventional nibs and holds up better in tough applications
- NEW ClipGrip Cap for convenient pocket storage and easier removal
- Marking temperature range: -50°F to 150°F (-46°C to 66°C)

ART NO.	COLOR C	ASE QTY.
ip Size	1/8"	
6960	□ White	48
6961	Yellow	48
6962	Red	48
6963	■ Black	48
6964	Orange	48
6965	■ Blue	48
6966	Green	48
6967	■ Silver	48
6970	Light Green	1 48
6971	Light Blue	48
6972	Gold	48
6973	Pink	48
6974	Purple	48
6975	■ Brown	48
Carded		
6956	☐ White	24
6957	Yellow	24
6958	■ Black	24
6959	Red	24
ips		
6908	Replacement Ni	b 144



www.laco.com

See our Merchandiser Catalog for these and other point-ofpurchase displays

VALVE ACTION® MERCHANDISERS

customer service 800-621-4025

# LIQUID PAINT MARKERS


# PRO-LINE® PAINT MARKERS High-strength, lightweight barrel

- Valve-actuated tip is available in Fine (1/16") and Micro (1/32") tip sizes for ultimate precision
- for industrial use
- · Ideal for metal, also suitable for wood, glass, plastic, rubber and
- Available in 9 bold colors
- Xylene-free for less odor. Does not contain any chemicals listed in California Proposition 65, the EPA HAPS list or SARA 313, minimizing employee health, environmental and waste disposal concerns
- Self-storing cap with integrated
- Ergonomic design for comfortable extended use
- Marking range: 0°F to 150°F (-18°C to 66°C)


s		F
Albertail PRO-LINE Control line	Made PRO-LINE MADE	

PART NO.	COLOR	CASE QTY.
Fine		
Tip Size	1/16"	
96871	☐ White	48
96872	Yellow	48
96873	■ Black	48
96874	Red	48
96875	■ Blue	48
96876	Green	48
96877	Orange	48
96878	Pink	48
96879	Light Green	1 48
Fine Ca	rded	
96857	■ White	24
96858	Yellow	24
96859	Red	24
96860	■ Black	24
Micro		
Tip Size	1/32" —	
96888	□White	48
96889	Yellow	48
96890	■ Black	48
96891	Red	48


# **PRO-WASH®** PAINT MARKERS








- Available in six colors for color coding, for reject/accept quality control processes, parts assembly or for shift/operator identification
- Marks with xylene-free paint. Complies with California Prop 65. EPA HAPS and SARA 313
- Fast-drying: 30-60 seconds
- Marks on metal, glass, plastic and other non-porous surfaces



Removable Marks in Real Paint!

Fine and Micro Tip



 Valve-actuated tip releases paint on demand for smooth continuous use

· High-strength, lightweight barrel designed for industrial use

• Rugged, vapor-lock cap design prevents nib dry-out when not in use

• Marking range: 0°F to 150°F (-18°C to 66°C)



PART NO.	COLOR CA	ASE QTY.
Tip Size	1/8"	
Bulk		
Pro-Wa	ash D	
97010	☐ White	48
97011	Yellow	48
97012	■ Red	48
97013	■ Black	48
97015	■ Blue	48
97016	■ Green	48
Pro-Wa		
97030	□ White	48
97031	Yellow	48
97032	Red	48
97033	■ Black	48
97035	■ Blue	48
97036	■ Green	48
Carded		
Pro-Wa	ash D	
97017	☐ White	24
97018	Yellow	24
97019	■ Red	24
97020	■ Black	24
Pro-Wa	ash <b>W</b>	
97037	☐ White	24
97038	Yellow	24
97039	■ Red	24
97040	■ Black	24
Tips		
97023	Replacement Tips	144

# LIQUID PAINT MARKERS

#### PRO-MAX® PAINT MARKERS

#### Big, Bold Marks in Permanent Paint

#### • Largest marks available (9/16") in an industrial paint marker

- Ideal for identification, fill-in marking, signage or safety marking on any surface
- Fast-drying, bold, long-lasting opaque paint is xylene-free for less odor. Complies with California Prop 65, EPA HAPS and SARA 313 standards.
- Valve-actuated tip releases paint on-demand for smooth, continuous use

# • Durable, long-lasting nib

marks in 3 different sizes • Self-storing cap fits snugly on

- end of marker when in use Available in 6 bright.
- ultra-visible colors • Marking range: 0°F to 150°F (-18°C to 66°C)

One Tip, 1	One Tip, Three Mark Sizes:								
3/16" Bulk	5/16"	9/16"							
90900	☐ White	24							
90901	Yellow	24							
90902	Red	24							
90903	■ Black	24							
90904	Orange	24							
90905	Blue	24							
Carded									
90910	□White	12							
90911	Yellow	12							

PART NO. COLOR

## **BALL PAINT MARKER**<sup>®</sup>



# Marks on Smooth or Rough Surfaces

- Marks with real paint, dries in 5 minutes Durable metal ball
- tip marks on wet, oily, smooth and rough surfaces including metal, wood, plastic, glass and any hard surface
- Ideal for color coding, inspection, shipping, identification, assembly and fabricating
- Lead-free, non-toxic

• Marks are	
weather-resistant,	
fade-resistant	

- Unbreakable plastic bottle with 1/8" steel ball tip
- Stores in pocket for easy access
- Plastic cap keeps tip clean between jobs
- Available in 7 vivid colors for color coding
- Marking range: -50°F to 150°F (-46°C to 66°C)



#### **DURA-BALL®** PAINT TUBE MARKERS



- Durable steel ball tip marks on smooth or rough surfaces
- Marks with real paint and dries in 5 minutes
- All colors are low chloride making them safe for marking stainless steel and nuclear applications
- Marks on all metals, wood, plastic, glass, any hard surface

# **Metal Ball Tip**

- Marks are weather-resistant, fade-resistant
- Marks on vertical or overhead surfaces without running or dripping
- Marking range: -50°F to 150°F (-46°C to 66°C)



BALL PAINT

A BILLE

PART NO.	COLOR	CASE QTY.
Tip Size	1/8"	
96652	☐ White	48
96653	Yellow	48
96654	■ Red	48
96655	■ Black	48
96656	Orange	48
96657	■ Blue	48
96658	Green	48
96659	Pink	48
96660	■ Violet	48
96661	■ Brown	48
96662	■ Gray	48
96663	Beige	48

# **SOLID PAINT MARKERS**





in stick form. The markers combine the long-lasting durability of paint with the ease of application of a crayon. The result is a marker that is cleaner, easier and more efficient to use than a paint and brush. Our wide variety of Paintstik markers includes over 20 unique formulas to meet every need. From extreme cold environments (-50°F) to high-heat work applications (2200°F), Markal Paintstik markers are suitable for any surface that is smooth or rough, clean or oily. For a complete guide to marking temperature ranges, see chart on page 15.

originators

stick form, Markal has it all!

þaint

# **SOLID PAINT-AMBIENT SURFACE MARKERS**



• Real lead-free paint in stick form; combines long-lasting durability of paint with the ease-of-use of

- Weather-resistant, UV-resistant
- Ideal for layout, color coding, fabrication and identification
- Marks through oil and water
- dirty surfaces • For use on metal, wood, plastic, concrete, rubber, glass, cardboard

• Marks on smooth, rough, rusty or

- and paper Available in 3 sizes standard 11/16", fine 3/8" and bold I"
- Lead-free, non-toxic
- Standard Paintstik® (11/16") uses #101 & #102 holder (p. 32)
- B-3/8" uses #107 holder (p. 33)
- Marking range: -50°F to 150°F (-46°C to 66°C)

PART NO.	COLOR CASE	QTY.
Standard	Size:	
II/I6" x	4-3/4"	
80220	■ White	144
80221	Yellow	144
80222	Red	144
80223	■ Black	144
80224	Orange	144
80225	■ Blue	144
80226	Green	144
80227	■ Pink	144
80228	■ Purple	144
80229	■ Brown	144
80230	■ Gray	144
80231	Gold	144
80232	Aluminum	144
82821	Fluor: Yellow	144
84810	☐ White	48
84811	Yellow	48
84812	Red	48
84813	■ Black	48
84814	Orange	48
84815	■ Blue	48

	x 4-3/4" ☐ White Car	-J-J 7/
	Yellow Car	
	tiks per card	000 50
Fine Siz		
80420	☐ White	144
80421	Yellow	144
King Siz		
	□White	144







**PAINTSTIK® HOLDERS** 



Clean, comfortable, convenient. Complete selection on pp. 32-33

customer service 800.621.4025

www.laco.com www.markal.com

# SOLID PAINT-AMBIENT SURFACE MARKERS

# B-E® PAINTSTIK®

#### For Marking Very Rough Surfaces

- For marking forgings, castings, rough logs, lumber, concrete and other rough surfaces
- Marks will withstand prolonged immersion in water
- Lead-free, non-toxic
- Long-lasting, weather-resistant, fade-resistant
- Uses #101 & #102 holder (p. 32)
- Marking range: -50°F to 150°F (-46°C to 66°C)

	PART NO.	COLOR	CASE QTY.
-	Size: 11	/16" x 4-3	3/4"
1	80620	■ White	e 14
	80621	Yellov	v 14
5	80622	Red	14
	80623	■ Black	14
9	80624	Oran	ge 14
8	80625	Blue	14

# **B-L®** PAINTSTIK®

# **Bleeds Through Solvent-Based Paints**

- Marks bleed through solventbased or oil-based paints • For fabricating structural steel
- or layout work where the marks are required to bleed through a primer coat covering the marks
- To prevent bleeding through the finish coat, seal the marked areas
- with water-based epoxy paint
  - For marking under water-based primers use the BL-W Paintstik®
  - Uses #101 & #102 holder (p. 32)
  - Marking range: -50°F to 150°F (-46°C to 66°C)

PART NO.	COLOR	CASE QTY.
Size: 11	/16" x 4-3/	4"
80725	■ Blue	144
84834	■ Blue	48

### **BL-W® PAINTSTIK®**

# **Bleeds Through Water-Based Paints**



- Marks bleed through water-based
- For fabricating structural steel or layout work where the marks are required to be seen through the primer coat covering the marks
- For marking under solvent-based or oil-based primers use the

B-L Paintstik®

- Uses #101 & #102 holder (p. 32)
- Marking range: -50°F to 150°F (-46°C to 66°C)

PART NO.	COLOR	CASE QTY.
Size: I I	1/16" x 4-3	3/4"
80735	■ Blue	144

# C® PAINTSTIK®



- For marking on smooth surfaces such as: cold rolled steel, sheet metal, plate glass and plastic
- Long-lasting, weather-resistant, fade-resistant
- For Marking on Smooth Surfaces
  - Marking range: 0°F to 150°F (-18°C to 66°C)

• Uses #101 & #102 holder (p. 32)

PART NO.	COLOR	CASE QTY.
Size: I I	/16" x 4-3	3/4"
80820	☐ Whit	e 144
8082 I	Yellov	w 144

# E® PAINTSTIK®



- High-intensity colors
- For greater visibility in dimly
- For coding, identification, layout and assembly work
- Long-lasting, weather-resistant, fade-resistant

# For High-Visibility Marks

Available in regular and king size
• Uses #101 & #102 holder (p. 32)

• Marking range: -50°F to 150°F (-46°C to 66°C)

l	Standar	rd Size: x 4-3/4"	
H	88620	■ White	14
ı	88621	Yellow	14
ı	88622	Red	14
ľ	88624	Orange	14
ı	88625	■ Blue	14
ı	King Siz	ze: I" x 4-3/4"	
	88640	■ White	14

PART NO. COLOR

#### PAINTSTIK® HOLDERS



Clean, comfortable, convenient. Complete selection on pp. 32-33

# SOLID PAINT-AMBIENT SURFACE MARKERS

# F® PAINTSTIK®

#### **All-Purpose Fluorescent Marker**

- Ultra-high-visibility fluorescent colors
- For marking metal, wood, glass, plastic, concrete, rubber, cardboard and paper
- Marks through oil and water
- Ideal for layout, inspection and

- color coding • Glows under black light
- Marking range: -50°F to 150°F (-46°C to 66°C)
- Uses #101 & #102 holder (p. 32)



# FAST DRY® PAINTSTIK®



- Ideal for marking in fabricating shops and assembly lines where immediate handling is necessary

• Marks dry in 5 minutes

- For marking metal, wood, glass, plastic, concrete, rubber, cardboard and paper
- **Dries in 5 Minutes**
- 3/8" size for marking smaller
- Marking range: -50°F to 150°F (-46°C to 66°C)

å	PART NO.	COLOR	CASE QTY.
l	Size: II/	16" x 4-3/4"	
1	82720	☐ White	72
ı	82721	Yellow	72
ı	82722	Red	72
ı	Size: 3/8	" x 4-3/4"	
	82730	■ White	72
	82731	Yellow	72
1			

### M® and M-IO PAINTSTIK®



#### Marks Annealed, Normalized & Heat-Treated Surfaces

- Marks withstand annealing and heat-treating operations
- For welds, ingots, castings, forgings and annealed parts
- Will not come off in oil or water
- Uses #101 & #102 holder (p. 32)
- Mark at room temperature M withstands 1600°F (871°C) M-10 withstands 1800°F (982°C)

TAIL HO	OULUII	ONOE QTII
M Size:	11/16" x 4-3	3/4"
81920	☐ White	144
81921	Yellow	144
81922	■ Red	144
81923	■ Black	144
M-10 S	ize:     /   6" x	4-3/4"
82020	☐ White	144
Į.		

PART NO. COLOR

#### N® PAINTSTIK®

# Marks Will Not Show Through Top Coat. Dries Overnight

- Marks will not show through top coat of primer or finish layer of paint
- Ideal for shipbuilding or other metal fabrication that will be given a final coat of paint
- For marking metal, wood, glass, plastic, concrete, rubber, cardboard, paper and ceramic
- Will mark on wet, dry, oily, rusty, icy, smooth or rough
- Uses #101 & #102 holder (p. 32)
- Marking range: 0°F to 150°F (-18°C to 66°C)

	PART NO.	COLOR	CASE QTY.
	Size: 11	/16" x 4-3/4	"
	82120	■ White	144
E	82121	Yellow	144
	82123	■ Black	144
Span			

# O-10 PAINTSTIK®



# Marks Heavily Oiled Surfaces. Dries Overnight

- For marking heavily oiled cold rolled steel and other oily surfaces
- Uses #101 & #102 holder (p. 32)
- Marking range: 0°F to 250°F (-18°C to 121°C)

١	PART NO.	COLOR	CASE QTY.
ĺ	Size: 11	/16" x 4-3/4"	
ı	82220	■ White	144
ì			

#### **PAINTSTIK® HOLDERS**



Clean, comfortable, convenient. Complete selection on pp. 32-33

# SOLID PAINT-AMBIENT SURFACE MARKERS

# P PAINTSTIK® • Real paint in stick form, non-

#### **Removes in Pickling Baths**

- Uses #101 & #102 holder (p. 32)
- Marking range: -50°F to 150°F (-46°C to 66°C)

	PART NO.	COLOR	CASE QTY.
,	Size: 11	/16" x 4-3/4"	
I	83420	☐ White	144
II			

# the pickling bath and will not interfere with the galvanizing

drying

 For marking steel prior to galvanizing process

• Marks are completely removed in

#### WS-3/8® PAINTSTIK® **Water Soluble** • Uses #107 holder (p. 33) • Water soluble for easy removal • Smaller diameter for finer line • Marking range: -50°F to 150°F

• Ideal for the temporary marking of plastics, glass, painted metal

surfaces, polished aluminum, car

bumpers and exotic metals

PART NO.	COLOR	CASE QTY.
Size: 3/8	3" x 4-1/4"	
82420	☐ White	144
82421	Yellow	144
82422	Red	144
82423	■ Black	144

QUIK STIK® PAINT MARKER

# Fast-Drying, Long-Lasting Marks

- Smooth-marking, fast-drying paint marks dry in 5-7 minutes
- Bright, bold, fade-resistant colors
- More marks for the money, 20% longer than other brands
- Plastic holder with self-storing cap prevents breakage, keeps hands and clothing clean
- Stick advances by turning twist-up knob

(-46°C to 66°C)

- Marks on virtually any surface: metal, glass, plastic, wood, cardboard, paper, etc.
- Marking range: 0°F to 140°F (-18°C to 60°C)

PART NO.	COLOR	CASE QTY.
Size: 11/	16" x 6"	
Bulk		
61118	Red	24
61119	■ Black	24
61120	☐ White	24
61117	Yellow	24
61049	Red	72
61050	■ Black	72
61051	☐ White	72
61053	Yellow	72
61069	Green	72
61070	■ Blue	72
61071	Orange	72
61073	Purple	72
Carded		
61063	■ Red	24
61064	■ Black	24
61067	☐ White	24
61068	Yellow	24












Clean, comfortable, convenient. Complete selection on pp. 32-33

# **SOLID PAINT- MARKING TEMPERATURES**

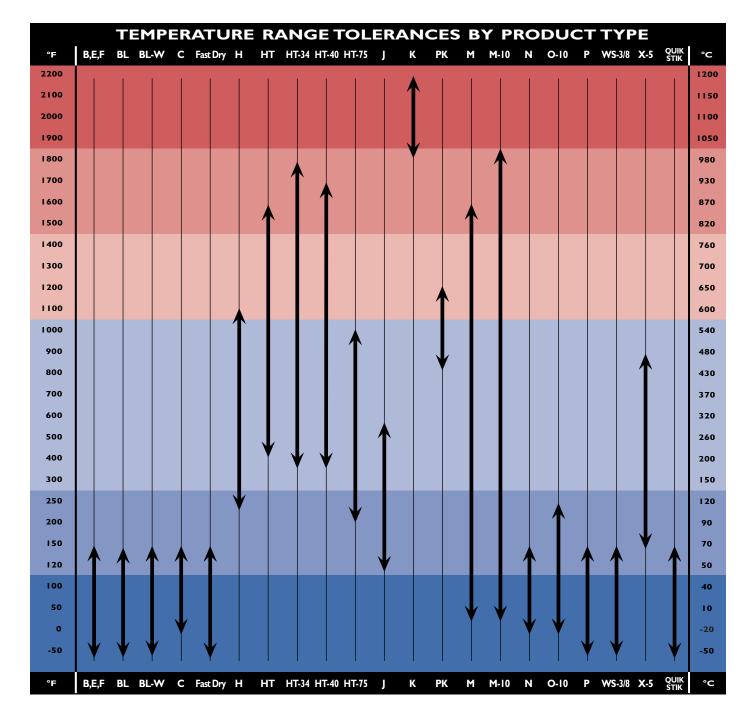

Determine the proper Markal® Paintstik® for your specific application. The chart provides you with the optimal marking temperature range for each of our Paintstik markers. This information should be used as a general guide only. For specific marking applications, please contact your local Markal Sales Representative or contact our Customer Service Department at 800-621-4025. They will be happy to recommend the best marking product for your specific application.

- Marks will not run, char, discolor, peel or crack
- Marks are long-lasting, weatherresistant and fade-resistant
- Uses #100 & #111 holder (pp. 32-33)
  Marking range: 225°F to 1100°F

PART NO.	COLOR	CASE QTY.
Standar	d Size: 3/8"	x 4-5/8"
81020	☐ White	144
81021	Yellow	144
81022	■ Red	144
81023	■ Black	144
81025	■ Blue	144
81026	■ Green	144
81029	■ Brown	144

# HT® PAINTSTIK®

PAINT MARKERS

OLID

H® PAINTSTIK®

• Real paint in stick form

#### • Real paint in stick form

- Bright colors for higher visibility
- Marks very hot coils, billets, slabs, bars, ingots, etc.
- Marks will not run, char, discolor, peel or crack

#### Marks Hot Steel 400° to 1600°F

(204°C to 871°C)

(107°C to 593°C)

- Marks are weather-resistant and fade-resistant
- Available in two sizes, regular and king size
- Uses #100, #102K & #111 holder (p. 32-33)
  Marking range: 400°F to 1600°F

PART NU.	CULUK	CASE UIT.
Standar	d Size: 3/8" >	c 4-1/2"
81220	☐ White	144
81221	Yellow	144
81222	Red	144
81223	■ Black	144
81225	■ Blue	144
81226	■ Green	144
King Siz	e: 3/4" x 4-5	/8"
81210	☐ White	144

#### HT-34® PAINTSTIK®

# Marks Hot Steel 400° to 1800°F

- Real paint in stick form
- Marks very hot coils, billets, slabs, bars, ingots, etc.
- Marks will not run, char, discolor, peel or crack
- Marks are long-lasting, weatherresistant, fade-resistant
- Uses #100, #102K & #111 holder (pp. 32-33)
- Marking range: 400°F to 1800°F (204°C to 982°C)

PART NO.	COLOR	CASE QTY.		
Standard Size: 3/8" x 4-1/2				
84720	☐ White	144		
King Size: 3/4" x 4-5/8"				
84710	☐ White	144		

#### HT-40® PAINTSTIK®

- Real paint in stick form
- Marks very hot coils, billets, slabs, bars, ingots, etc.

- Marks Hot Steel 350° to 1700°F
- Marks will not run, char, discolor, peel or crack
- Marks are long-lasting, weatherresistant, fade-resistant
- Uses #100 & #111 holder (pp. 32-33)
- Marking range: 350°F to 1700°F (177°C to 927°C)

PART NO.	COLOR	CASE QTY.
King Siz	ze: 3/4" x 4-5	5/8"
81610	☐ White	144

#### HT-75® PAINTSTIK®

Real paint in stick form

16

- Marks aluminum, steel, hot rubber, etc.
- Marks are weather-resistant and fade-resistant
- Makes broad, highly visible marks
- Uses #102K holder (p. 32)

Marks Hot Steel 200° to 1000°F

• Marking range: 200°F to 1000°F (93°C to 538°C)

Part no.	COLOR	CASE QTY.
Size: 3/	4" x 4-5/8"	
84820	■ White	144

#### **PAINTSTIK® HOLDERS**



Clean, comfortable, convenient.
Complete selection on pp. 32-33

# **SOLID PAINT- HOT SURFACE MARKERS**

#### J® PAINTSTIK® Marks Hot Steel 120° to 600°F

- Real paint in stick form
- For foundries and mills where extreme temperature variance is encountered
- Dual purpose marker marks on either hot or cold surfaces; recommended where temperature varies rapidly from cold to hot
- Marks will not run, char, discolor, peel or crack
- Uses #100 & #111 holder
- Marking range: I20°F to 600°F (49°C to 316°C)

(pp. 32-33)

GOLON	GASE Q11.
3" x 4-5/8"	
☐ White	144
	8" × 4-5/8"

#### K® PAINTSTIK®

#### • Real paint in stick form

- Marks on extremely hot steel
- Marks will not run, char, discolor, peel or crack
- Marks iron and steel castings, ingots, forgings, blooms, billets and high-temperature metal alloys
- Uses #102K holder (p. 32)

Marks Red-Hot Steel 1800° to 2200°F

 Marking range: 1800°F to 2200°F (982°C to 1204°C)



#### PK® PAINTSTIK®

- Marks are removed completely in any standard acid pickling bath
- Bright white paint in stick form
- Marks on hot steel coils
- Marks will not run, char or discolor
- No ghosting image on the metal surface
- Marking range: 800°F to 1200°F (427°C to 649°C)

Marks Remove in Pickling Bath

CASE QTY.

PART NO. COLOR

#### X-5® PAINTSTIK®

#### • Real paint in stick form

- Dual purpose marker marks on either hot or cold surfaces; recommended where temperature varies rapidly from cold to hot
- Marks will not run, char, discolor, peel or crack
- Marks on hot slabs, rough castings, ingots, forgings and rough surfaces that encounter wide temperature
- $\bullet$  Bright colors for higher visibility

variations

• Uses #100 & #111 holder (pp. 32-33)

Marks Hot Steel 150° to 900°F

 Marking range: I50°F to 900°F (66°C to 482°C)

COLOR	CASE QTY.
8" x 4-5/8"	
☐ White	144
Yellow	144

#### **PAINTSTIK® HOLDERS**



Clean, comfortable, convenient.
Complete selection on pp. 32-33

customer service 800·621·4025 www.laco.com www.markal.com

17

# **FELT-TIP INK MARKERS**





felt-tip marker that all jobsites, workshops and shipping departments demand. For 1,001 everyday uses, Markal® has the perfect color, shape and size marker for your needs. Inside the toolroom, warehouse, on the production line or at the construction site, DURA-INK markers are unbeatable in versatility. They work on metal, wood, cardboard, paper, ceramics, rubber and glass. With chisel tips, heavy-duty plastic and metal barrels, and high-intensity colors, DURA-INK is the marker of choice for every industrial application.

# **FELT-TIP INK MARKERS**

#### DURA-INK® 15



- Ideal for fineline markingExtra-tough tip won't spread
- or mush
   Smear-resistant, water-resistant,
- fast-drying

   Marks on metal, wood, cardboard, paper, plastic, glass, etc.
- For identification of parts, layout work, and marking cartons and crates

**Fine Bullet Tip** 

• Durable plastic barrel & cap with metal pocket clip





#### **DURA-INK® 25**



#### INK® 25

- Heavy-duty metal barrel with pocket clip on cap
- Chisel tip makes fine lines or broad marks
- Extra-large ink supply for greater mileage

# King Size, Chisel Tip

- Use on cardboard, wood, metal, paper, ceramics, glass and leather
  For identification of equipment,
- For identification of equipment, marking shipping cartons, making signs, etc.

PART NO.	COLOR	(	CASE QTY.
Mark Siz Thin Side		Thick Sic	de 1/4"
96222	■ Re	d	48
96223	■ Bla	ck	48
Carded			
96237	■ Bla	ck	24
2 Marke	rs per o	ard	
61			

## **DURA-INK® 55**



# Medium Tapered Chisel Tip

- Ergonomic design for extended use
  Versatile tapered chisel tip for
- 1/16" and 3/16" marks
- Long mileage, economical
- Ink formulated for industrialstrength usage
- Smear-resistant, water-resistant, fast drying
- Durable plastic barrel & cap with pocket clip

 Use on cardboard, ceramics, glass, cloth, lumber, paper, rubber and steel

96528	Red	48
96529	■ Black	48
96530	Blue	48
96531	■ Green	48
Carded		
96534	■ Black	24
2 Marker	s per card	



PART NO. COLOR

DURA-INK® MERCHANDISERS



See our Merchandiser Catalog for these and other point-of-purchase displays

21

# **FELT-TIP INK MARKERS**

# **DURA-INK® 80**



- Large ink supply for increased marking mileage
- Smear-resistant, water-resistant.
- Tough, durable tip marks on all surfaces, including: metal, wood, cardboard, glass, paper, etc.

#### **Valve-Actuated Tip**

- Metal barrel • Tapered, bullet tip
- Valve-actuated tip, releases ink on-demand for smooth, continuous use





#### **DURA-INK® 200**




#### • Extra-wide chisel tip for 5/8" and 3/8" marks

- Jumbo ink supply for greater mileage
- Ink formulated for industrial-strength usage
- Durable cap and barrel for heavy-duty use

#### **Broad Chisel Tip**

- Use on cardboard, wood, metal, paper, ceramics, cloth, glass, etc.
- For identification of equipment, signs and marking containers





PART NO. COLOR

Medium Tip

96638

Carded

96639

Mark Size: 3/16"

96623 ■ Black

☐ White

CASE QTY.

24

24

#### PLASTIC TAG ALL-WEATHER® MARKER



**DURA-INK® MERCHANDISERS** 

# For Polyurethane Tags

- Marks etch into plastic tags for long-lasting visibility
- Fast-drying, non-smearing
- Weather-resistant, UV-resistant
- Valve actuated tip

- 4	11
	ALL-WEATHER BLAST
-	36
- 1	MG
1	

1	WEATHER
	MARKE
	TAG
- 1	

See our Merchandiser Catalog or these and other point-of-	
ourchase displays	

# **FELT-TIP INK MARKERS**







- Industrial strength felt-tip ink marker for temporary marking
- •Mark can be removed quickly and easily with dry rag, towel, or eraser
- •No residue or ghosting after mark is removed on most industrial surfaces
- Suitable for any non-porous surfaces
- Ideal anywhere that temporary marks are required such as parts identification, quality control processes and white board marking

# **Bullet Tip**



• Will not scratch painted

• Suitable for surfaces that

halogen specification

opaque, visible mark

require a low-chloride/low

• 1/8" bullet felt-tip makes solid,

surfaces


**NEW!** 



customer service 800-621-4025

# **LUMBER & TIMBER MARKERS**



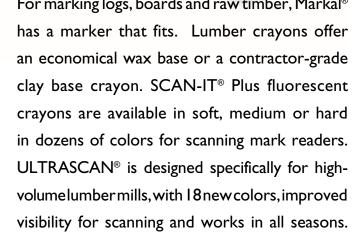

OPTIMARK®, the newest product in the lumber marker family, offers cut-off saw operators a choice. With OPTIMARK, you get 6 distinctive colors, easier clean-up with less downtime and bright, clear marks that virtually eliminate missed scans.

# **LUMBER & TIMBER MARKERS**

# PRO-EX® CRAYON

# Extruded, Clay-Based

- The clay-based "feel" that highvolume lumber crayon users prefer
- Stronger formula for reduced breakage
- Display packs have a convenient tear-off top to display the crayons for individual sales
- Superior performance on wet wood

· Also known as layout chalk

• Standard 1/2" hex shape fits

the #109 Peterson holder (p. 25),

#106 holder and #108 holder

or"keel"

(p. 33)

Lead-free

# • Lead-free

- Standard 1/2" hex shape fits the #109 Peterson holder (p. 25), #106 holder and #108 holder (p. 33)
- Marking range: -20°F to 150°F (-29°C to 66°C)

	PART NO.	COLOR	CASE QTY.
١	Size: 1/2' Bulk	' x 4-5/8"	
	80379	■ Brown	144
	80380	□ White	144
	80381	Yellow	144
	80382	Red	144
3	80383	■ Black	144
Ī	80384	Orange	144
)	880385	■ Blue	144
Ц	80386	■ Green	144
1	80387	■ Pink	144
ĸ	80388	Purple	144
-	Size: 1/2'	' × 4-5/8"	
	Carded		
	80601	Yellow	36
	80602	Red	36
	80603	■ Black	36
	80605	■ Blue	36
	4 Crayon	s per card	

#### **LUMBER CRAYON #200**



# Economical, Wax-Based

- Economical
- Use on cardboard, ceramics, concrete, lumber, metal, paper, plastic and rubber
- Marking range: -20°F to 150°F (-28°C to 66°C)

PART NO.	COLOR	CASE QTY.
Size: 1/2	" x 4-5/8"	
Bulk		
80350	■ White	144
80351	Yellow	144
80352	■ Red	144
80353	■ Black	144
80354	Orange	144
80355	Blue	144
80356	Green	144
80358	Purple	144

LUMBER CRAYON

#### **LUMBER CRAYON #500**



- Also known as layout chalk or "keel"
- Clay-based formula provides longer marking mileage
- Makes weather-resistant, water-resistant marks
- Lead-free
- Marks on concrete, wood, metal, plastic, rubber, paper, cardboard and ceramics
- Standard 1/2" hex shape fits the #109 Peterson holder (p. 25),

Clay-Based

- #106 holder and #108 holder (p. 33) • Marking range: -20°F to 150°F
- Marking range: -20°F to 150°f (-28°C to 66°C)

Size: 1/2"	x 4-5/8"	
80320	☐ White	144
80321	Yellow	144
80322	Red	144
80323	■ Black	144
80324	Orange	144
80325	■ Blue	144
80326	Green	144
80327	Pink	144
80328	■ Purple	144
Fluoresco	ent Colors	
80451	Yellow	72
80452	■ Red	72
80454	Orange	72
80456	Green	72
80462	Pink	72
80462	■ Pink	72

PART NO. COLOR

# **LUMBER & TIMBER MARKERS**

# **ULTRASCAN® FLUORESCENT** For All Grade Mark Readers

- Polymer formula offers superior performance to conventional wax fluorescent crayons
- More color separation and better character recognition than competitive wax fluorescent crayons
- Excellent writing on wet and green lumber, even with a fungicide coating
- One temperature formula eliminates need for multiple hardnesses, rated for temperatures between 0°F and
- Up to four times the writing life of competitive wax fluorescent crayons, especially on rough surface hardwood and green lumber
- The highest fluorescent response of any lumber grading marker
- · Longer writing life and high strength formula for lower crayon usage
- Specifically developed for excellent performance with Lucidyne, Newnes McGehee and Cypress grade mark readers
- Superior performance in other applications requiring fluorescent marking and recognition, such as Picture Tally systems and Sick Optics luminescence sensors
- For use with ProGrade Holder

PART NO.	COLOR	CASE Q
Standard Size: 11.	/16" Round x 4-5/8"	
82430	■ Brick Red 11	7
82431	■ Magenta 21	7
82432	■ Red Orange 31	7
82433	Orange 41	7
82434	■ Berry 51	7
82435	Lime 61	7
82436	■ Burgundy 12	7
82439	Dark Orange 42	7
82440	■ Brown 52	7
82441	Green 62	7
82442	Rust 13	7
82446	Yellow Orange 53	7
82447	Yellow 63	7
82450	■ Blue Green 70	7
82457	■ Light Blue 81	7
82452	■ Royal Blue 80	7
82454	Red Violet 101	7
82451	■ Bright Pink 9 I	7
82459	■ Bright Orange 44	7
82461	■ Spring Green 71	7
82462	■ Dark Brown 55	7
82463	Golden Rod 54	7
82466	Purple 24	7
82467	■ Bright Red 34	7
82468	Neon Orange 103	7
82469	■ Tan 45	7
82470	Tangerine 03	7

# SCAN-IT® PLUS FLUORESCENT For All Grade Mark Readers



- Certified to meet the specifications of Lucidyne ColorScan® grade mark readers
- Each batch tested on Lucidyne ColorScan® grade mark reader
- Extremely accurate readability lowers your operating costs
- Works on wet or green wood, as well as wood that contains pitch and sap
- Smear-resistant
- 15 fluorescent colors available in 3 hardnesses
- No time-consuming trial and error crayon selection
- For use with #109 & #112 Peterson holder (p. 25)
- Temperature ranges: Soft: 0°F to 40°F (-17°C to -4°C)

Medium: 40°F to 70°F (-4°C to 21°C) Hard: 70°F to 100°F (21°C to 38°C)

PART NO.	NI LI	4 5 (0)	COLOR CA	ASE QTY.
	2" Hex x			
Soft	Med.			
82630	82330	82230	■ Blue Moon	144
82631	8233 I	82231	Orange Sherbet	144
82632	82332	82232	■ Watermelon Red	144
82633	82333	82233	■ Red Cedar	144
82634	82334	82234	Grasshopper Green	144
82640	82340	82240	Pink Lightning	144
	82341	82241	■ Emerald Green	144
	82342	82242	Pumpkin	144
82643	82343	82243	Russet Brown	144
	82344		■ Slate Gray	144
Standar	d Size: I	I/I6" Ro	und x 4-5/8"	
Soft	Med.	Hard		
82635	82335	82235	■ Blue Moon	144
82636	82336	82236	Orange Sherbet	144
82637	82337	82237	■ Watermelon Red	144
82638	82338	82238	■ Red Cedar	144
82639	82339	82239	Grasshopper Green	144
82645	82345	82245	■ Pink Lightning	144
82646	82346	82246	■ Emerald Green	144
82647	82347	82247	Pumpkin	144
82648	82348	82248	Russet Brown	144
82649	82349	82249	■ Slate Gray	144
82655	82355	82255	Pink Marble	144
82656	82356	82256	■ Terra Cotta	144
82657	82357	82257	■ Moss Green	144
82658	82358	82258	Lime Green	144
82659	82359	82259	Lemon Yellow	144

# **LUMBER & TIMBER MARKERS**

# OPTIMARK® FLUORESCENT Designed for Optimizing Cut-off Saws

- 6 visually distinct fluorescent colors allow you to easily identify up to 6 different operators
- Lasts longer up to 4x the writing life compared to ordinary crayons and fluorescent markers
- Reduced color transfer to machinery surfaces
- Fewer misreads
- Easier clean-ups and less downtime
- Bright, clear marks eliminate missed scans
- Standard 1/2" hex shape fits the #109 Peterson holder (see below), #106 holder and #108 holder (p. 33)

PART NO.	COLOR	CASE QTY.
Size: 1/2" Hex x 4-5/8	3"	
82742	Red	144
82743	Orange	144
82744	Pink	144
82745	Red Orange	144
82746	Yellow Orange	144
82747	Burgundy	144

#### **PROGRADE HOLDER**

- | | / | 6" diameter, push-button design for round Lumber Crayons
- •For UltraScan and Scan It 11/16" round markers
- •The flexible front of the holder cushions the markers and the hand from shock, resulting in less marker breakage and hand fatigue
- Delrin, brass and aluminum construction, virtually indestruc-

# •Sturdy, easy to replace

leather wrist strap is included



п	85496	12

#### **#109 PETERSON HOLDER**

- For Scan-It Plus® 1/2" hex crayons
- For all 1/2" hexagonal markers • Made of durable hardwood
- Protects crayon from breakage
- Comes with leather wrist strap
- 3' extensions available on special order

• Length 5"



PART NO.	DESCRIPTION	CASE QTY.
85490	#109	12
85491	w/3' extension	on 12

# **#112 PETERSON HOLDER**

- For Scan-It Plus® 11/16" round crayons
- Hardwood construction
- Protects crayon from breakage
- Comes with leather wrist strap

• Length 5"



85489 #112

# SPECIALTY MARKERS





For clean, accurate, highly visible marks, Markal's all-purpose markers like the TRADES-MARKER®, China Markers and Carpenter's Pencils are the perfect solution.

or cardboard, Markal® has the marker for you.

Silver-Streak® and Red-Riter® Welders Pencils and Markers are two choices that professionals rely on for tried-and-true results. Both mark on metal and are ideal for metal layout and fabrication work.

When in need of temporary marks at an economical cost, Markal Soapstone and Railroad Chalk are great options. Whatever your special application, Markal has the marker for you.

# SPECIALTY MARKERS

#### **SILVER-STREAK® & RED-RITER® Welders Pencils**



- Economical, high-strength pencil is ideal for marking all types of metal surfaces – even oily, rusty or wet
- Perfect for metal layout and

fabrication work.

- Marks resistant to torch flames; will not rub off or burn off like soap-
- Highly visible marks illuminate when cutting or welding.

- Durable marks will not scratch or abrade metal surfaces.
- Hexagonal shape reduces barrel roll unlike competitive
- Pencils are pre-sharpened. Sharpen with any standard pencil sharpener.



PART NO.	COLOR	CASE QTY.
Size: 1/2	" x 4-5/8"	
96101	Silver	72
96100	Red	72
Carded		
96102	Silver	24
3 Pencils	per card	

#### **SILVER-STREAK®** METAL MARKER

- For Metal Layout and Fabrication
- Available in flat and round sizes • Marks on all types of metal surfaces
- Ideal for metal layout and fabrication work
- Marks won't rub off like soapstone
- Marks are resistant to torch flames
- Durable metal and plastic holders prevent breakage
- Holders include pocket clip
- Round holder features a built-in sharpener
- Available only as carded product

PART NO.	SHAPE	CASE QTY.
96004	Flat	24
96006	Round	24
96107	Round	
	and 5 Refills	3 24
Refills		
96018	Flat, 25 Pack	. 24
96002	Flat, 100 Pac	k 24
96007	Round, 6 Pa	ck 24
Holders		
96017	Flat, 10 Pack	. 12

#### RED-RITER® METAL MARKER



#### Fineline Marking for All Metal Surfaces

- Ideal for metal layout and fabrication work
- Marks won't rub off like soapstone
- Marks are resistant to torch flames
- High visibility on aluminum and stainless steel
- More visible through filter plates
- - No sharpening necessary • Includes handy pocket
  - Available only as carded product

SHAPE	CASE QTY.
Flat	24
25 Pack	24
Flat, 10 Pack	12
	Flat

customer service 800.621.4025 www.markal.com www.laco.com

# SPECIALTY MARKERS

#### **SOAPSTONE** Temporary Marking for Metal Surface Welding



- Marks will not contaminate welds and are easily removed
- Available in flat, round and square shapes; holders available for the flat and round sizes
- \*Uses Soapstone Holders:
- All-metal construction for long worklife
- Prevents breakage
  - Allows full use of each soapstone marker
  - Handy pocket clip
  - Length Flat 5-3/4"
  - Length Round 5-1/4"
  - \*Holders sold separately

PART NO.	SIZE CAS	E QT
80129	5" × 1/2" × 3/16" flat	43
80130	5" x 1/4" round	43
80131	5" x 1/4" x 1/4" square	43
Holder	^S	
80140	For flat soapstone	- [
80141	For round soapstone	-13
Carde	Ь	
80140	Flat holder	
	and 5 Refills	2

# TRADES-MARKER® ALL-PURPOSE Marks Plastic, Glass, Metal, Wood, Cardboard & Paper



- Retractable grease pencil offers more convenience and longevity than a standard china marker
- Marks on plastic, glass, wood, metal, china, cardboard and paper
- Marks won't rub off and are weather-resistant
- Push-button holder advances the stick as needed
- Needs no sharpening, eliminates the hassles found with the old paper-wrapped china markers
- Handy pocket clip keeps it in your pocket
- Available in 5 bright colors
- Available only as carded product

PART NO.	COLOR CAS	E QTY
96000	One Holder and 5 Assort. Refills	24
Refills		
96009	Orange, 6 Pack	24
96042	☐ White, 6 Pack	24
96043	Yellow, 6 Pack	24
96044	■ Black, 6 Pack	24
96045	Red, 6 Pack	24

#### **CHINA MARKER**



#### Paper-Wrapped Marker

- The economical solution for High-visibility colors marking on paper, cardboard, Non-toxic pigments plastic, wood, glass, ceramics
  - Marks on porous and non-porous surfaces

PART NO.	COLOR	CASE QTY.
96010	☐ White	72
96011	Yellow	72
96012	■ Red	72
96013	■ Black	72
96014	Crimson	72
96015	■ Blue	72
96016	Green	72

#### **CARPENTER'S PENCIL** Clean, Accurate Marks on Wood & Other Surfaces



and some metals

Moisture-resistant

Smooth writing

- for marking on cardboard, paper, wood and plastic
- Flat lead design for easier marking
- Available in soft, medium and hard lead to best fit your job
- Uses #106 holder (p. 33)
- Length: 7"

96927	Hard lead	144
96928	Medium lead	144
96929	Soft lead	144

PART NO. HARDNESS

# SPECIALTY MARKERS

#### TYRE MARQUE® RUBBER MARKING Ideal for Temporary Tire Marking



- Ideal for temporary marking on many surfaces, including tires
- Marks easily on wet or cold surfaces
- Lead-free, zinc-free
- Brighter, smear-resistant colors

- Marks can be painted over • Longer marking mileage
- Marking range: -20°F to 130°F (-29°C to 24°C)



# ZEPHYR® PAINTSTIK® MARKER



#### **Glass Marker**

- Ideal for temporary markings

• Water soluble for easy removal

• Leaves no residue or ghosting

on glass

- Marks automobile glass, plastic, glass, painted metal, sheet steel, polished aluminum, car bumpers, tires and exotic metals
- More water-resistant than the WS-3/8® Paintstik®, yet still water soluble
- Marking range: -50°F to 150°F (-46°C to 66°C)

FANT NO. U	ULUN	UMBE QIII
Size: 11/16'	' x 4-3/4"	
51321	Yellow	144

# **LACQUER-STIK®**



- Specially formulated paint in stick form designed to color-brighten stamped or engraved lines and lettering
- Ideal for metal, glass, ceramics, plastic, wood and rubber
- Paint stays flexible—expands and contracts with the surface

# Highlighter Fill-in Paint

- Contains no solvents • Long-lasting-will not rub off or smear
- No mess or waste-eliminates dripping brushes and paint spills
- Meets Fed. Spec.TT-F-325a

Size: 3/8	8" x 4-1/4"	
51120	☐ White	144
51121	Yellow	144
51122	Red	144
51123	■ Black	144
51131	Gold	144

#### **RAILROAD CHALK**



# **Ideal for Temporary Marks on Most Surfaces**


- Marks on metal, wood, concrete, cardboard, rubber, plastic, plus much more
- Tapered shape makes the chalk easy to hold
- Makes broad, easy-to-read marks due to large I" wide by 4" long stick
- Size: I" x 4"

100	FANT NO.	GULUN	UHOL UIII
1	Size: I"	' x 4"	
	80500	☐ White	576
	8050 I	Yellow	576
	80502	Red	576
3	80505	Blue	576
	80506	■ Green	576

28 29 customer service 800-621-4025 www.markal.com www.laco.com

# TEMPERATURE INDICATORS





The Markal Thermomelt temperature indicator with superior break-resistance is the industry's largest, longest-lasting stick, which reduces costs and downtime.

Thermomelt comes through when the heat is on, at any temperature!



#### THERMOMELT® HEAT-STIK®

- Accurate, fast, low-cost method for measuring surface temperatures
- Ideal for applications such as annealing, forging, welding, bending, forming and any place where temperature measuring is necessary
- When using, the initial mark
- appears dull and chalky; when desired temperature is reached, the mark quickly melts to a glossy, transparent-appearing liquid
- Accurate to within  $\pm 1\%$  of rated temperature
- 33% bigger and stronger; same proven reliability

### **Industry's Longest-Lasting Stick**

- Bigger, break-resistant stick cuts
- Improved holder features a durable metal shaft and convenient pocket clip

down on replacement costs

• Bigger design makes Thermomelt®

the industry's longest-lasting heat

- stick and prevents it from slipping back inside • Size: 5" long
- Meets ANSI/ASME Code B32.1

• Gravity advance holder protects

& B31.3, AWS D1.1 and ASME Code Sec. I, III and VII, NIST traceable

# **AVAILABLE IN THESE 88 EXACT TEMPERATURE RATINGS** FROM 100°F TO 2200°F (38°C TO 1204°C)

TEMPE	RATURE	PART NO.									
F	С	STICK	F	C	STICK	F	С	STICK	F	U	STICK
100	38	86400	269	132	86580	463	239	86778	1250	677	86985
109	43	86409	275	135	86589	475	246	86787	1300	704	86994
113	45	86418	282	139	86598	488	253	86796	1350	732	87003
119	48	86427	288	142	86607	500	260	86805	1400	760	87012
125	52	86436	294	146	86616	525	274	86814	1425	774	87021
131	55	86445	300	149	86625	550	288	86823	1450	788	87030
138	59	86454	306	152	86634	575	302	86832	1480	804	87039
150	66	86463	313	156	86643	600	316	86841	1500	816	87048
163	73	86472	319	159	86652	625	329	86850	1550	843	87057
175	79	86481	325	163	86661	650	343	86859	1600	87 I	87066
182	83	86490	331	166	86670	700	371	86868	1650	899	87075
188	87	86499	338	170	86679	750	399	86877	1700	927	87084
194	90	86508	344	173	86688	800	427	86886	1750	954	87093
200	93	86517	350	177	86697	850	454	86895	1800	982	87102
206	97	86522	363	184	86706	900	482	86904	1850	1010	87111
213	101	86526	375	191	86715	950	510	86922	1900	1038	87120
219	104	86535	388	198	86724	1000	538	86931	1950	1066	87129
225	107	86544	400	204	86733	1022	550	86940	2000	1093	87138
238	114	86553	413	212	86742	1050	565	86949	2050	1121	87147
250	121	86562	425	218	86751	1100	593	86958	2100	1149	87156
256	124	86569	438	225	86760	1150	621	86967	2150	1177	87165
263	128	86571	450	232	86769	1200	649	86976	2200	1204	87174

Note: 12 THERMOMELT® Sticks are considered a case for combination with other Markal® products. Temperatures can be assorted within I dozen/box.

# THERMOMELT STIKS IN 29 EXACT CELCIUS TEMPERATURES\*

PART NO.	С								
86402	50	86516	200	86734	400	86870	700	86932	1000
86404	75	86405	225	86770	450	86878	750	86950	1050
86401	100	86563	250	86807	500	86887	800	86960	1100
86408	125	86407	275	86824	550	86896	850	86968	1150
84664	150	86626	300	86842	600	86905	900	86977	1200
86410	175	86698	350	86860	650	86923	950		

<sup>\*</sup> accuracy range for Celsius temperature is 3%

# **MARKER HOLDERS**

#### **Wooden Holder** #100

• 4" wooden holder for hot surface Paintstik® markers

• Works with markers: -HT-40® -X-5® -HT-34

• Length 4"



# **MARKER HOLDERS**

#### #106 For Carpenter's Pencil and Lumber Crayon

• Unique dual design holds the #200 or #500 Lumber Crayons, Pro-EX® Crayons, and Markal® Carpenter's Pencil

and WS-3/8® Paintstik® markers

- Durable, lightweight construction
- Handy on construction sites





-B-E® -F® -0-10 -B-L® -M® -P,

-BL-W® -M-10 long worklife

• Length 5"



on special order

• Push-button metal holder for B-3/8 • 2' and 3' extensions are available

• All-metal construction for long worklife

• Length 5-1/2"

• Length 5"

PART NO. DESCRIPTION CASE QTY. 85300 #107 85310 w/2' extension 12 85320 w/3' extension 12

#### #102 II / I6" Push-Button Holder

- 6" push-button metal holder for Paintstik® markers
- All-metal construction for long worklife
- Works with Paintstik® markers: -B® -E® -N®
- -B-E® -F® -0-10 -B-L® -M®
- -BL-W® -M-10
- 2' and 3' extensions are available on special order
- Length 6"



#### #108

#107

- For all 1/2" hexagonal markers
- Durable aluminum construction
- Push-button operation
- Protects crayon from breakage
- Comes with leather wrist strap
- 2' and 3' extensions available on special order



For 3/8" Markers



PART NO. DESCRIPTION CASE QTY. 85400 #108

#### #102K For Hot Surface Markers

- 7-1/4" metal holder for Paintstik® markers
- All-metal construction for long worklife
- Works with Paintstik® markers: -HT® King Size
- -HT-75<sup>®</sup> -HT-34<sup>®</sup> King Size
- 2' and 3' extensions are available on special order
- PART NO. DESCRIPTION CASE QTY. 85200 #102K 85210 w/2' extension 12 85220 w/3' extension 12

#### #111

# For Hot Surface Paintstiks®

- II" push-button metal holder for hot surface markers
- Works with hot surface markers:: -HT-34® -J®
  - -HT-40<sup>®</sup> -X-5<sup>®</sup>
- 2' and 3' extensions are available on special order
- All-metal construction for long worklife
- Length 11"



32 customer service 800-621-4025


# PLUMBING & CHEMICAL PRODUCTS

### A Leader in Chemical Product Solutions

LA-CO Industries, Inc. has been making quality plumbing and chemical products for the past seven decades. From Slic-tite® and LA-CO® Regular Flux for the professional plumber, to EZ Break® for the industrial chemical processing plant, LA-CO manufactures products to fit the needs of today's industry. For a full list of available products please refer to our Plumbing & Chemical Products Catalog, or visit our web site at www.laco.com.

#### **SLIC-TITE® PASTE WITH PTFE**

- Contains more PTFE particles for greater sealing power
- ABS plastic pipe threads
- For sealing water, air, steam, natural gasoline, ethanol and oil



gas, LP gas, refrigerants, ammonia,









#### **Premium Thread Sealant**

- Do not use on oxygen service; use Slic-Tite® PTFE Thread Tape or Oxytite® Paste
- Washes off hands and clothing
- Non-toxic, non-drying
- Sealing temperature range: -50°F to 500°F (-46°C to 260°C)

#### • Working pressures: 3,000 PSI (204 BAR) LACO for gas, 10,000 PSI (680 BAR) for liquids Slic-tile • USDA approved for use in federally inspected meat and poultry plants

	PART NU.	SIZE	GASE Q11.
	41209	1/4 pt. BIC	12
	42009	1/4 pt. BIC	24
	41219	1/2 pt. BIC	12
ď	42019	1/2 pt. BIC	24
U	42012	l pt.	24
	42029	I pt. BIC	24
	42013	I qt.	12
a.	42049	I qt. BIC	12
	42014	I gal.	4
9	42015	5 gal.	- 1
1	42069	55 gal.	1
	Dozen l	Display Pack	Tubes
	42002	1-1/2 oz.	24
	DI 0		

42002	1-1/2 oz.
BIC = Brown	ush in Cap

#### **REGULAR FLUX PASTE**

- Super detergent action cleans as it solders
- Water soluble for faster rinsing from pipe lines



- Contains no zinc chloride
  - Use with all lead-free and common soft solders
  - For use on copper, brass, galvanized iron, lead, zinc, tin, silver, nickel, mild steel, terne plate and malleable iron



Noveon approved

- Meets ASTM B813
- All weather

· New



PART NO.	SIZE	CASE QTY.
22101	2 oz.	48
22104	4 oz.	48
22194	4 oz. BIC	48
22107	I lb.	24

BIC = Brush in Cap

#### **EZ BREAK®** ANTI-SEIZE COMPOUND

- Copper-based anti-seize and lubricating compound
- Recommended for coating nuts. bolts, valves, flanges, splines for easy break out after years of service

# Copper Grade

- Resists rust and corrosion • Meets Mil. Spec. Mil-A-907E
- Authorized by USDA for use in federally inspected meat and poultry plants





PART NO.	SIZE C	ASE QTY.
08924	4 oz. BIC	24
08910	10 oz. BIC	24
08916	14 oz. Aerosol	12
08907	16 oz. BIC	24
08925	8 lbs.	4
08950	42 lbs.	
08969	425 lbs.	

BIC = Brush in Cap

#### **EZ BREAK®** ANTI-SEIZE COMPOUND

- Contains fine particles of nickel and other additives
- Contains no copper


- Nickel Grade
- Resists rust and corrosion • Helps prevent galling of stainless steel threads • Makes disassembly easy, even after years of service
  - Temperature: to 2600°F (1427°C)



	PART NO.	SIZE	CASE QTY.
	08971	8 oz. BIC	24
	08972	16 oz. BIC	24
4	08973	8 lbs.	4
	08978	42 lbs.	1
3	08979	425 lbs.	1

# PLUMBING & CHEMICAL PRODUCTS

#### **COOL GEL® Heat Barrier Spray** • Helps prevent heat damage to



- Protects painted and finished surfaces from discoloration due to adjacent torch operations
- Unique gelled formula sticks to surfaces without dripping or running off
- Clear, non-staining gel leaves no residue, eliminating clean-up



- Reduces danger of fire to surrounding surfaces such as rubber and plastic seals and gaskets Convenient trigger
- spray

High-Density, Premium-Grade





Cool Gel protects surfaces when welding

#### **ZOOM SPOUT® OILER**

 Premium-grade, all-purpose turbine-grade lubricating oil for general applications

SEE COOL GEL

IN ACTION AT

• Use on rotating and reciprocating equipment, bearings, motors and slides

# **Lubricating Oil for General Applications** • Flexible telescoping-spout extends

7" for difficult-to-reach areas



PART NO. SIZE

Dozen Display Box

44080 1/4" × 300"

# **SLIC-TITE® PTFE THREAD TAPE**

#### • Thickness 3 mils

- High-density
- Provides a highly resistant seal on pipe threads for all types of service
- Suitable for use with solvents, chemicals, oxygen and on food lines
- Non-toxic



# • Permits easy disassembly, even

• Meets Mil. Spec. T-27730A

after many years

- Sealing temperature range: -450°F to 550°F (-268°C to 288°C)
- Pressure: to 2.000 PSI (136 BAR)
- NEW Yellow for gas line and Pink for water line usage



#### 1/4" × 600" 44081 12 44082 $1/2" \times 300"$ 12 44083 $1/2" \times 600"$ 12 44084 1/2" × 1200" 12 44085 $3/4" \times 300"$ 12 44086 3/4" × 600" 44087 1" × 300" 12 44088 $1" \times 600"$ 1/2" x 260" Yellow I 2 44095 1/2" × 260" Pink 12 Carded - 2 per Card 44003 1/2" × 600" 12

CASE QTY.

# PTFE THREAD TAPE

- Thickness 3 mils
- · Contractor-grade, low-density
- Provides a highly resistant seal on pipe threads for all types of service
- Suitable for use with solvents, chemicals, oxygen and on food lines
- Non-toxic

- Permits easy disassembly, even after years of service
- Meets Mil. Spec. T-27730A
- Sealing temperature range: -450°F to 550°F (-268°C to 288°C)
- Pressure: to 2,000 PSI (136 BAR)



Contractor-Grade

PART NO.	SIZE	CASE QTY.
44070	1/4" × 520"	144
4407 I	$1/2" \times 260"$	144
44072	$1/2" \times 520"$	144
47272	$1/2" \times 520"$	72
44073	1/2" × 1296	6" 144
44074	$3/4" \times 260"$	144
44075	3/4" × 520"	144
44076	3/4" × 1296	6" 144
44077	I" × 260"	144
44078	I" × 520"	144
44079	l" x 1296"	144

# OTHER LA-CO® PRODUCT CATALOGS



#### **PLUMBING & CHEMICAL PRODUCTS CATALOG**

A full listing of quality products that drive your business today and in the future. Including thread sealants, fluxes, heat protection, leak detection, repair compounds and many more industrial and plumbing products.



#### LIVESTOCK MARKING CATALOG

LA-CO's ALL-WEATHER® brand of livestock marking products includes solid paint in stick form, aerosol spray paints, liquid spray dyes and ear tag markers for all livestock marking applications.

# www.laco.com www.markal.com

#### Call, write or email for additional information

LA-CO Industries, Inc., 1201 Pratt Boulevard
Elk Grove Village, Illinois 60007-5746
1-800-621-4025 • 1-847-956-7600 • Fax: 1-800-448-5436
Email: customer\_service@laco.com
Family owned and operated since 1934

